



WEVER & DUCRÉ
LIGHTING

PLANO 2.0 PAR16

118220S0

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling , Recessed
Tilt max 35°
Rotation 355°
White Aluminium
RAL 9006^a
IP20
Interior
Output: 945^b, 1020^c lm
CIE flux code: 94 98 100 100 93

LED

Lamp 2 x PAR16
Socket GU10
max. per socket 12.0 W
CRI ≥ 90

ELECTRICAL

100 - 240 V
LED Inset 6.5 W
Total insets 13.0 W
Class 2

PHYSICAL

Length 156 mm
Width 85 mm
Height 120 mm
0.44 kg
wire springs


CUTOUT

Length 74 mm
Width 148 mm
Min. ceiling thickness 2 mm
Max. ceiling thickness 18 mm
Recessed depth 125 mm


^a Color may deviate slightly due to production conditions.

^b PAR16 LAMP 2700K CRI90


^c PAR16 LAMP 3000K CRI90

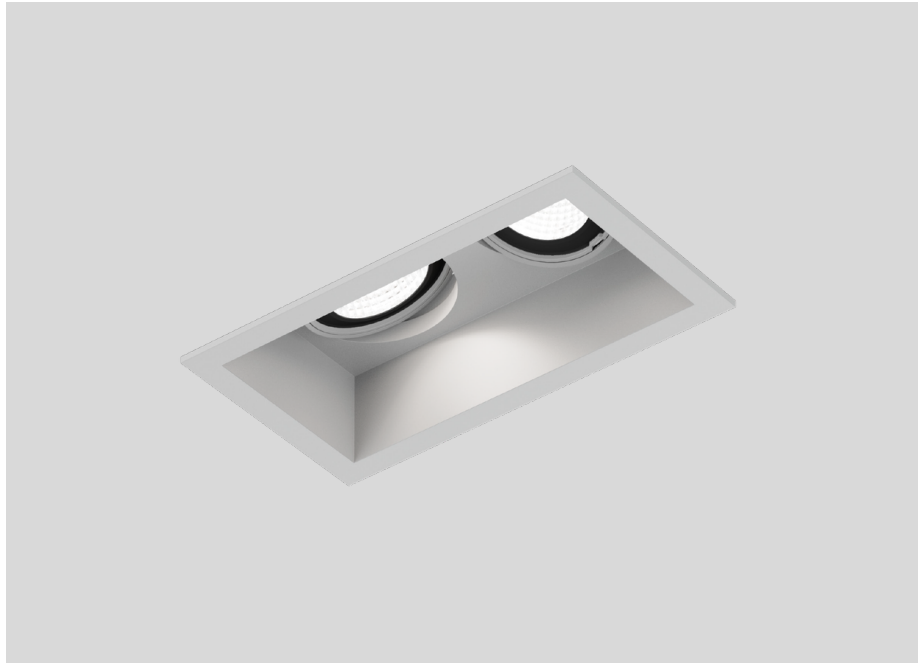

Rectangular ceiling recessed downlight made from die-cast aluminium; adjustable; surface White Aluminium; wet painted, matt smooth; RAL 9006; installation without tools using wire springs; suitable for ceiling thickness of 2-18 mm; recessed depth 125 mm; lamp socket GU10; lamp type PAR16; max. 12W; 100 - 240 V; 355° rotatable and 35° tiltable; degree of protection IP20; Class 2; lamp not included;



LIGHT DISTRIBUTION



[118220S0] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

PLANO 2.0 PAR16

118220S0

LAMPS

PAR16 LED Lamp

TYPE	COLOUR	Ø · H (MM)	ORDERCODE
2700K >90 CRI GU10	Black	∅50-60	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Black	∅50-60	9 0 1 2 2 8 B 5
2700K >90 CRI GU10	White	∅50-60	9 0 1 2 2 8 W 3
3000K >90 CRI GU10	White	∅50-60	9 0 1 2 2 8 W 5
2700K >80 CRI GU10	Silver	∅50-60	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Silver	∅50-60	9 0 5 2 2 7 S 4

OTHER

Metal spring clip

TYPE	Ø (MM)	ORDERCODE
MR16 LED PAR16 max. 12W	59	9 0 0 1 9 7 0 0



Spring clip

TYPE	COLOUR	Ø (MM)	ORDERCODE
MR16 LED PAR16 max. 12W	Black	59	9 0 0 1 9 8 B 0
MR16 LED PAR16 max. 12W	Bronze	59	9 0 0 1 9 8 Q 0
MR16 LED PAR16 max. 12W	Silver	59	9 0 0 1 9 8 S 0
MR16 LED PAR16 max. 12W	White	59	9 0 0 1 9 8 W 0